




Rubber Products for the Agriculture Industry

featuring 

Adjusting Deck Height on a Draper Header to Create a 'Seal'

To prevent material from entering draper and cutter bar area maintain deck height so that the draper belt runs just below the cutter bar to help create a seal. See your owner's manual for the recommended gap settings for your specific header.

1. Loosen tension on draper (refer to your owner's manual).
2. Lift draper belt up at front edge past cutter bar.
3. Loosen lock nuts on the deck support (two or four depending on header).
4. Tap deck to lower (with belt pulled back), if raising tap using a punch.
5. Tighten deck support hardware.
6. Tension draper based on the manufacturer's instructions and recommended settings.

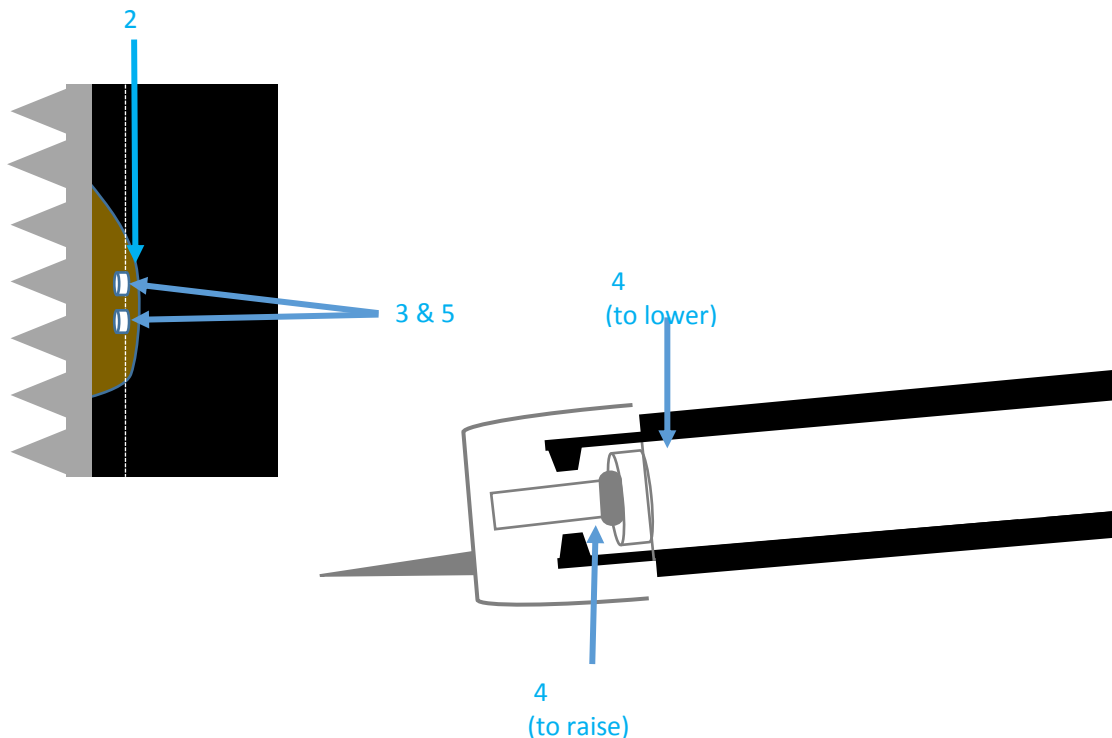

* These are general guidelines and will vary based on the make and model of the header. Please refer to your owner's manual and dealer for the recommended settings and instructions for your draper header.